



www.millenixlock.com  
SENSOR PINTU

PETUNJUK



Terima kasih untuk  
Memilih Rumah Pintar WiFi kamiSensor

## spesifikasi

Jenis baterai AA LR6 1.5V \*2 PCS  
Daya Siaga: Buka : 28.4uA tutup: 28.1uA  
Pemicu arus: 43A  
Pasangan saat ini: 37mA  
waktu kerja 4000  
Jenis nirkabel: 2.4GHz  
Nirkabel standar: IEEE 802.11b/g/n  
Nirkabel jarak: 45M  
Suhu Operasi: 0°C~40(32°F~104 °F)  
Kelembaban Operasi: 20%~85 %  
Suhu Penyimpanan: 0°C~60°C (32°F~140°F)  
Penyimpanan Kelembaban: 0%~ 90 %  
Ukuran: Bagian utama: 82mm x 42mm x16mm  
Bagian kedua: 82mm x 11mm x 18mm

## Indikator LED

Device Status	LED State
Smart Wi-Fi	Indicator flashes quickly
AP mode	Indicator flashes slowly
Turn on	Indicator flashes
Turn off	Indicator off
Reset	Indicator lights up for 4s and after 2 seconds lights off, device goes into configuration mode

## Bagaimana caranya? mengatur ulang?

- (1) Tekan tombol reset selama 6 detik sampai indikator flash dengan cepat. Kemudian perangkat berubah menjadi wifi pintar mode.
- (2) Tekan tombol reset lagi selama 6 detik sampai itu indikator berkedip perlahan. Perangkat berubah menjadi AP mode.

## Memulai dengan Smart Life Aplikasi

- 1. Unduh APLIKASI**
  - Unduh "Smart Life" aplikasi dari APP Store atau Google Mainkan untuk Anda seluler .




- 2. Daftar dan Gabung**
  - Meluncurkan itu "Smart Life" aplikasi.
  - Ke daftar, masuk milikmu seluler telepon nomor atau surel alamat, buat Sebuah kata sandi ,kemudian
  - Gabung ke itu aplikasi.

Masuk jika Anda memiliki akun sudah.

### 3. Menambahkan Perangkat

- Nyalakan sensor pintar yang mode defaultnya adalah Wi-Fi pintar modus .
- Pilih itu " + " simbol di itu atas tangan kanan sudut .
- Pilih milikmu produk Tipe dan mengikuti itu instruksi dari itu aplikasi.
- Jika koneksi gagal, coba gunakan AP Mode
- Di itu " Tambahkan perangkat " halaman Pilih " AP Modus " di atas pojok kanan dan ikuti petunjuk aplikasi.
- Akhirnya, miliki seru!

## Seperti Apa Antarmuka Pengguna Aplikasi ?

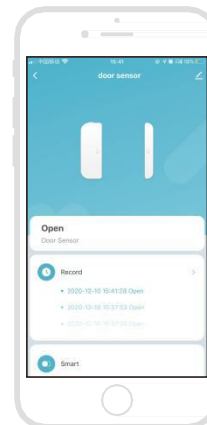

Smart Life

## Pengalaman Tingkat Lanjut Fitur

Kamu bisa pengalaman itu berbagai canggih fitur dari itu produk dengan itu aplikasi, hanya mencoba dan melakukan dia dirimu sendiri.

- Utama fungsi**
  - Bekerja status, Buka tutup itu pintu (yang perangkat
  - perlu dipicu untuk 3-5 detik)
  - Alarm rekaman (klik "SEJARAH").
  - Berbelok off/Aktif dorongan pemberitahuan (klik "PEMBERITAHUAN").
- Alarm tautan pengaturan**
  - Untuk menghubungkan dua Sensor melalui adegan pengaturan.
- Perangkat membagikan**
  - Mengizinkan yang lain ke kontrol itu perangkat
- Dorongan pemberitahuan**
  - Buka / tutup tekan pemberitahuan
- Menghapus perangkat**
  - Memulihkan bawaan pengaturan; Menghapus dan Menambahkan itu perangkat lagi untuk menghapus catatan dengan APLIKASI.



Membuat Rumahmu Lebih pintar

For More Information :



WiFi  
DOOR SENSOR  
INSTRUCTION



Thanks for  
Choosing our WiFi Smart Home Sensors

### Specifications

Battery type : AA LR6 1.5V \*2PCS  
Stand by current : open:28.4uA close:28.1uA  
Trigger current : 43mA  
Pairing current: 37mA  
Working time : 4000 times  
Wireless type: 2.4GHz  
Wireless standard: IEEE 802.11b/g/n  
Wireless range: 45M  
Operating Temperature: 0°C ~ 40°C (32°F ~ 104°F)  
Operating Humidity: 20% ~ 85%  
Storage Temperature: 0°C ~ 60°C (32°F ~ 140°F)  
Storage Humidity: 0% ~ 90%  
Size: Main body: 82mm x 42mm x 16mm  
Small body: 82mm x 11mm x 18mm

### LED State

Device Status	LED State
Smart Wi-Fi	Indicator flashes quickly
AP mode	Indicator flashes slowly
Turn on	Indicator flashes
Turn oV	Indicator oV
Reset	Indicator lights up for 4s and after 2 seconds lights oV, device goes into configuration mode

### How to reset?


- (1) Press the reset button for 6 seconds till the indicator flash rapidly. Then device turns to smart wifi mode.
- (2) Press the reset button again for 6 seconds till the indicator flash slowly. The device turns to AP mode.

### Get Started with Tuya Smart App

- 1. Download APP**
  - Download the "Smart life" app from APP Store or Google Play to your mobile.
- 2. Register and Login**
  - Launch the "Smart life" app.
  - To register, enter your mobile phone number or email address, create a password, then login to the app.
  - Login if you have an account already.
- 3. Add Device**
  - Power on the smart sensor which default's mode is Smart WiFi mode.
  - Select the "+" symbol on the top right-hand corner.
  - Select your product type and follow the instructions of the app.
  - If the connecting fails, try using AP Mode
  - On the "Add device" page select "AP Mode" on the top right-hand corner and follow the instructions of the app.
  - Finally, have fun!



### What's the App User Interface Like ?

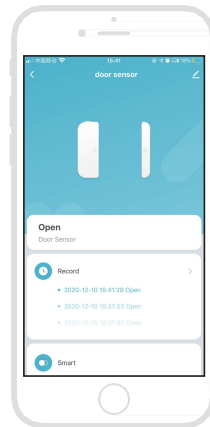

Smart life

### Experience Advanced Features

You can experience the various advanced features of the product with the app, just try and do it yourself.

#### Main function

- Working status, open/close the door (the device needs to be triggered for 3-5s)
- Alarm recording (click "HISTORY").
- Turn OV/On push notification (click "NOTICE").

#### Linkage alarm setting

- To connect two Sensors via scene setting.

#### Device sharing

- Allow others to control the device

#### Push notification

- Open/close push notification

#### Remove device

- Restore default settings; Delete and add the device again to clear the record by APP.



Make Your Home Smarter